



MK33

Capacitive Humidity Sensor

Product

Our specially-developed capacitive humidity sensor features a base capacitance of 300 pF, enabling a large humidity-temperature range and making it suitable for many applications. The sensor is optionally available with flexible or rigid connecting wires, making it the first choice for installation in detecting probes.

Advantages

- Employment in extreme environment conditions, such as hot oil, swimming pools, pigsty, and humidity generators
- Dewing resistant – fast recovery time after dewing and at high dewpoint temperatures
- Excellent drift values
- Extremely resistant to various chemicals
- Extremely wide temperature operating range
- Various wired solutions available
- RoHs compliant




Technische Daten

Humidity Operating Range:	0 ... 100% Relative Humidity
Operating temperature range:	-40 ... +190°C
Capacitance:	300 pF ± 40 pF (at 30% RH and 23°C)
Sensitivity:	0.45 pF / %RH (20 ... 95% RH)
Loss Factor:	≤ 0.01 (at 23°C, at 10kHz, at 90% RH)
Nonlinearity:	± 2.0% RH (15 ... 90% RH at 23°C, after one point calibration)
Hysteresis: 1h, 20% RH at 23°C	< 2.0% RH
→ 1h, 85% RH at 70°C	
→ 1h, 20% RH at 23°C	
Response Time T ₆₃ :	< 6 s (50% RH → 0% RH) at 23°C
Frequency Range:	1 ... 100 kHz (recommend 10 kHz)
Maximum Operating Voltage:	< 12 V _{pp} AC
Signal Form:	alternating signal without DC bias
Connectors:	Wires or customer specific

Construction Sizes

Dimension in mm

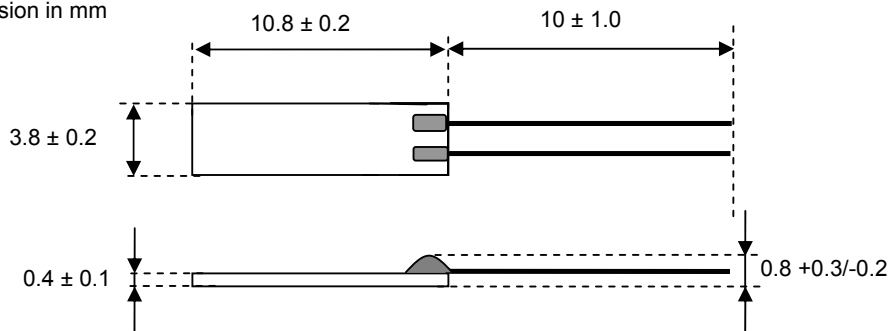


INNOVATIVE SENSOR TECHNOLOGY




MK33

Capacitive Humidity Sensor

Allowed Humidity-Temperature Range, operating conditions at atmospheric pressure (1bar)

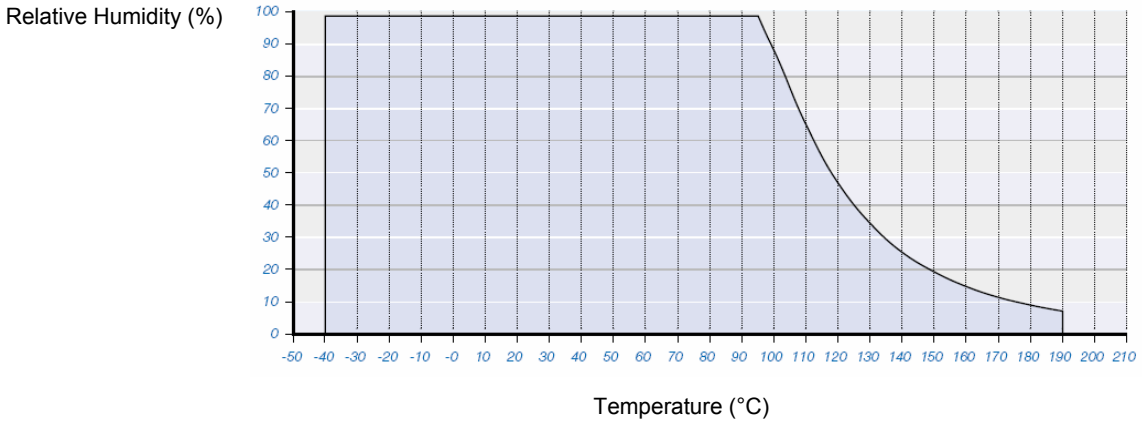

Sensor Characteristic

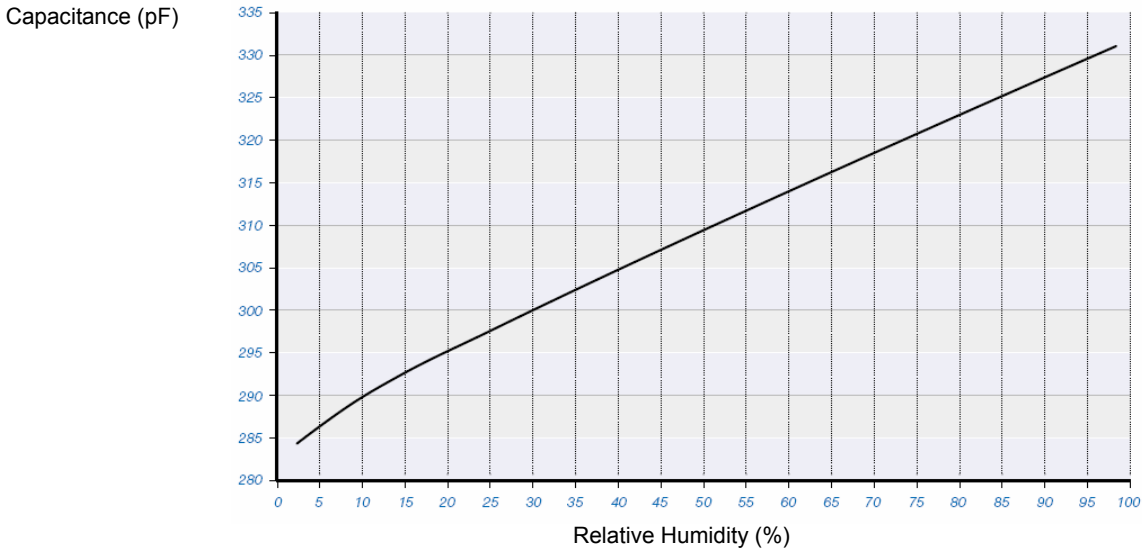

All mechanical dimensions are valid at 25°C ambient temperature, if not differently indicated. ■ All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics. ■ Technical changes without previous announcement as well as mistakes reserve. ■ The information on this data sheet was examined carefully and will be accepted as correct. No liability in case of mistakes. ■ Load with extreme values during a longer period can affect the reliability. All rights reserved. The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner. Typing errors and mistakes reserved. Product specifications are subject to change without notice.



INNOVATIVE SENSOR TECHNOLOGY

