


Driver Circuit Board DCB.S3.390

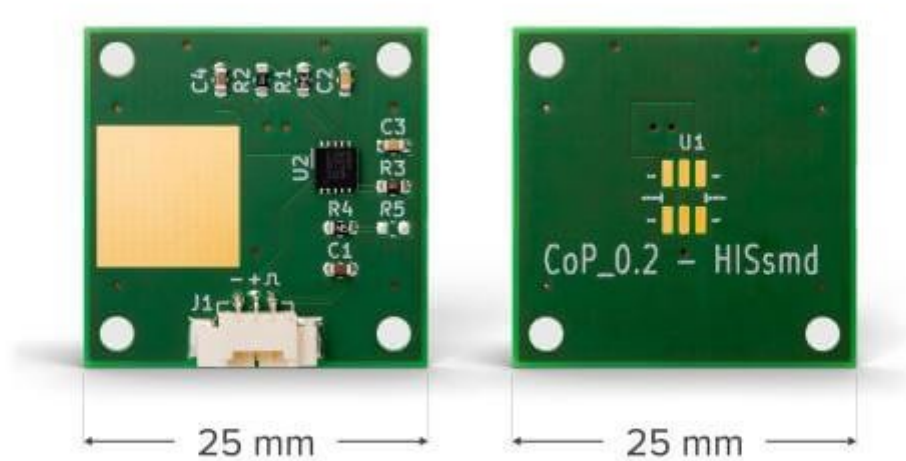

Driver circuit board for a quick evaluation of *HISsmd* series IR emitters

The Driver Circuit Board supports a quick evaluation of our IR emitters and can be ordered as single component (without IR emitter) or assembled with an IR emitter of the *HISsmd* series. Only a supply voltage and a pulse signal have to be applied to the 3-pin Molex PicoBlade 1.25 mm connector. For more information about its function, see our technical note.

Product Name: DCB.S3.390

Product type: Driver Circuit Board

Drive power: 390 mW

Input Voltage range: (3.0 ... 13) V

Pulse signal voltage Low/OFF: (0 ... 1) V

Pulse signal voltage High/ON: 1.5 V ... V_{in}

LDO regulator U1: LT3065

Product code: 155822

Product details

Accessories

For an easy evaluation and optimal implementation of our infrared emitters in different applications we offer an extensive range of Breakout Boards (BOB) and Driver Circuit Boards (DCB). The Breakout Board transfers the SMD footprint to 2.54 mm headers which allows an easy electrical contacting. All Driver Circuit Boards support a quick evaluation. They are small and use a low-cost driving circuit with a maximum stability close to a power regulated mode. Only a supply voltage and a pulse signal have to be applied.

HISsmd series

Miniaturized infrared sources in SMD housing

HISsmd series emitters are small, powerful infrared radiation sources that meet the demands for reliable miniaturized gas sensors and offer a wide range of new application scenarios. The low energy consumption, the high efficiency and the small size allow its use in portable, battery-powered, and mobile applications. The pioneering SMD package enables a fully automated production in high-volume markets.

Key features HISsmd series

- Pulsable thermal infrared source mounted in an industry standard (3x3) mm² SMD package
- Patented nanostructured radiating element generates black-body spectrum
- Wide wavelength range enables a broad range of applications
- Highest optical output power of up to 40 mW
- Hermetically sealed, high-quality filter windows guarantee long-term stable operation and high lifetime
- SMD package allows fully automatic assembly in high-volume series

Driver Circuit Board DCB.S3.390 > Details

The online shop

Quantity (pieces)	Price (per piece)
-------------------	-------------------

1-24	CHF 66.08
------	-----------

Sklad: **5**