
Conductivity sensor for low conductivity

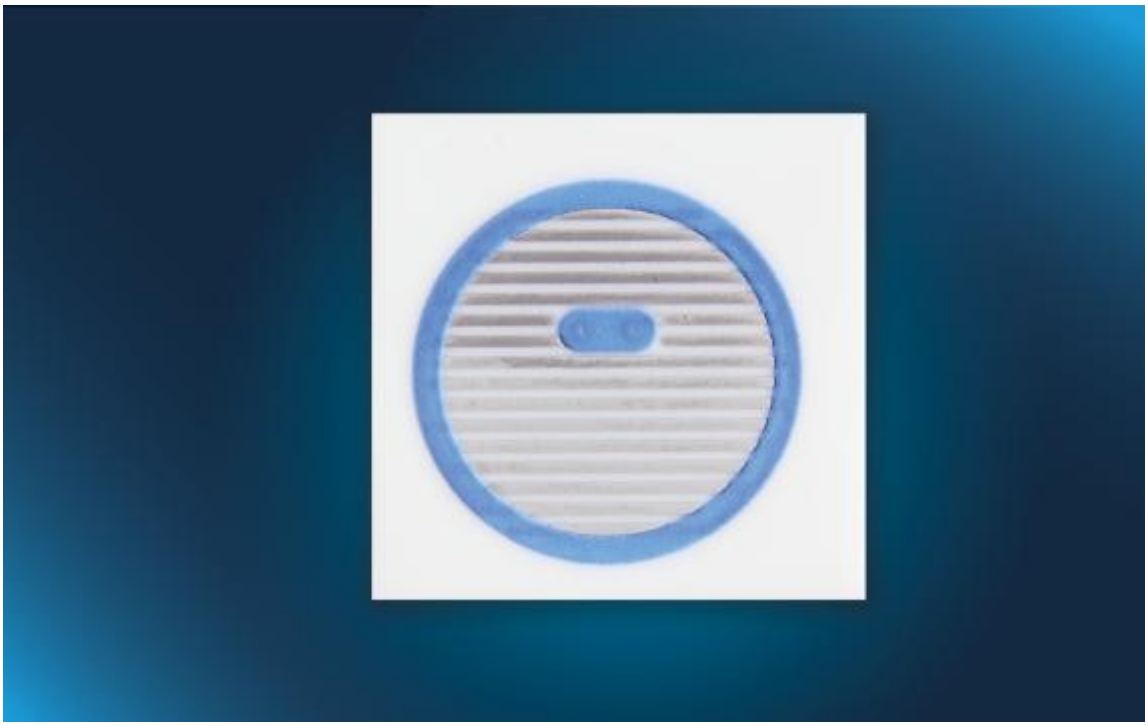

Optimal for applications with a conductivity measuring range from 1 µS/cm to 15 µS/cm (typical cell constant of 0.2 cm -1)

Ideal for lower conductivitiy measurement applications, e.g. coolant or pure water monitoring

Product Name: LFS.2ID.1212.63A2.4FC.P1K0.B
Leitfähigkeitsbereich: 1 µS/cm to 15 µS/cm
Zellkonstante: typical 0.2 cm-1
Layout: 2 Interdigitated electrodes and soldered temperatures sensor (Pt1000, class F0.3) on backside
Betriebstemperaturbereich: -30 °C to + 100 °C
Temperaturkoeffizient: Platinum 3850 ppm/K
Nennwiderstand: 1000 Ω at 0 °C
Toleranzklasse: IEC 60751 F0.3 (Class B)
Chipgrösse/Abmessungen:

11.85 mm x 11.85 mm x 0.63 mm (without temperature sensor soldered on backside)
Anschluss: Solderable pads
Product code: 158919

Product details

Benefits & Characteristics of the conductivity sensor

- Wide conductivity and temperature range
- Fast response time
- Optimal accuracy
- Resistance to various chemicals
- Excellent long-term stability
- Four-electrode measurement
- Customer-specific sensor available upon request

Quality

Consistent with the well-known, high-quality standards in Switzerland, IST AG is certified according to ISO 9001:2015 (quality) and ISO 14001:2015 (environment). Appropriate processes are part of our daily work. They are regularly audited and extended parallel to the growth of our company.

> Read more

The online shop

Quantity (pieces)	Price (per piece)
5-49	CHF 25.00
50-95	CHF 23.00
100-150	CHF 22.00

Lager: **50**