
HYT Evaluation board, multi-channel

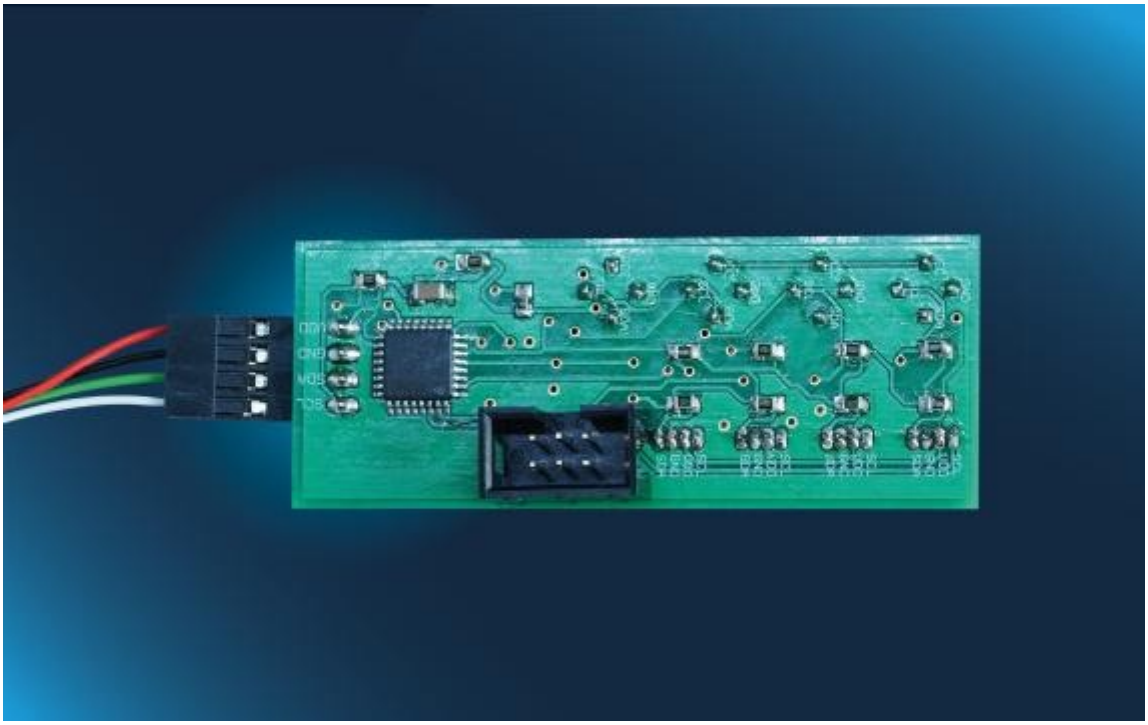

Humidity evaluation kit with user interface for Windows. Test board for humidity modules HYT271, HYT221 HYT939 and HYT.R411

Evaluation board compatible with all of iST`s standard humidity modules: HYT 271, 221, 939 and R411. Allows to parallel evaluation of up to 4 humidity modules. Directly executable, intuitive user interface on a USB dongle. Measure or set up logging on the fly to check performance in your application.

Product Name: Humidity evaluation kit with user interface for Windows
Operating humidity range: < 95% RH, non-condensing
Operating temperature range: -20 °C to +50 °C
Accuracy humidity: 0...10V according to HYT calibration
Accuracy temperature: 0...10V according to HYT calibration
Digital interface: I²C
Operating voltage: 5 V (USB)
Current consumption: 50 to 300 mA
Dimensions: 67.3 x 25.4 mm (LxW)
Connection type: USB dongle, 30 cm cable

Measured medium: Air/Gas
Product code: 154263

Product details

Quality

Consistent with the well-known, high-quality standards in Switzerland, IST AG is certified according to ISO 9001:2015 (quality) and ISO 14001:2015 (environment). Appropriate processes are part of our daily work. They are regularly audited and extended parallel to the growth of our company.

> Read more

The online shop

Quantity (pieces)	Price (per piece)
1-5	CHF 250.00

Stock: **15**