




innovative  
Sensor  
Technology

## SMD Pt100 0603 2ST F0.15

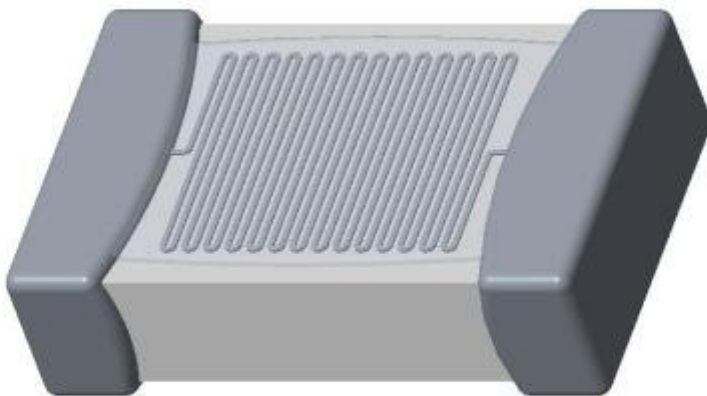

Pt temperature sensor, SMD size 0603 for the automatic assembling on PCBs, range -50 °C to +150 °C

SMD platinum 100 Ohm RTD component with contact lead-free galvanic tinned 99% Sn soldering pads, taped only

**Product Name:** P0K1.0603.2ST.A.S

**Operating temperature range:** -50 °C to +150 °C (boundaries:  $\pm 3^{\circ}\text{C}$ )

**TCR:** Pt 3850 ppm/K

**Chip size/dimensions:** 1.6 x 0.8 x 0.5 mm

**Connection type:** Soldering connection

**Packaging:** Taped only, sensor side down (without reel)

**Product code:** 156783

# Product details

## Platinum Sensors

Innovative Sensor Technology IST AG platinum temperature sensors provide solutions for extreme temperature applications and are designed with the highest quality materials, allowing them to operate within a wide temperature range of -200 °C to +1000 °C. Standard IEC 60751 sensors are offered in class F0.3 (0.12 %), class F0.15 (0.06 %), F0.1 (0.04 %), and higher accuracies upon request. Our sensors are available in wireless (SMD) and wired configurations, and in sizes ranging from 0.75 mm to 10 mm (L), and 0.75 mm to 5.08 mm (W). Standard sensors can be customized with a variety of lead wire material, insulations, length, and configurations.

With many years of experience, iST also offers development of customer-specific applications in terms of sensor technology development and consultation. As part of the standard development process, we give support at the point of implementation - this way we ensure the best sensor solution for specific applications.

[More information on platinum temperature sensors](#)

## SMD and FlipChip

### SMD

IST AG offers wireless RTD Platinum SMD sensors for automatic PCB assembly processes with wrap-around contacts on both ends. We offer different SMD technologies for different applications and temperature ranges, e.g. SAC305-tinned wrap-around contacts for the normal PCB assembly process, high temperature solder wrap-around contacts for high temperature applications up to +250 °C or Ni/Au wrap-around contacts for special requirements or wire bonding applications. The SMD sensors are available with various accuracies of up to IEC 60751 F0.15 (IST AG reference class A) and in different dimensions (0805/1206) with other dimensions upon request. SMD sensors are characterized by excellent long-term stability, fast response time and low self-heating.

The wireless iST FlipChip series features Pt temperature sensors with excellent long-term stability, fast response time and low self-heating. The FlipChips are developed with contacts on one side resulting in no short-cut risk on the backside of the chip. Furthermore, we offer different FC technologies for different assembly processes (reflow-soldering, bonding or welding). The FC sensors are available with accuracies of up to IEC 60751 F0.3 (iST reference class B) and in different dimensions (0603/0805/1206/further dimensions on request) with other dimensions available on request.

## **FlipChip**

The FC sensors are optimal for applications with limited space requirements and offer an optimal price/performance ratio. Due to the small mechanical dimensions, a standard 0805 FC will use the same space as a standard 0603 SMD sensor on a PCB.

## **SMD Pt500 1206 2ST F0.15, taped > Details**

## **Small dimensions**

IST AG offers various sensor solutions for applications with limited space requirements.

### **MiniSens**

iST MiniSens features the smallest footprint with dimensions of only 1.2 mm x 1.6 mm making the sensor an optimal solution for limited space applications. The MiniSens is available with accuracies of up to IEC 60751 F0.1 (IST AG reference class Y) and with long directly welded wires. The sensor can be used in applications with an operation temperature range of up to +600 °C.

The MiniSens is also offered with a metallized backside enabling optimal thermal coupling.

### **SlimSens**

The iST SlimSens sensor is specially developed for applications requiring sensors fitted into tubes with very small diameters. The SlimSens measures 0.8 mm x 3 mm and is the optimal solution for applications with tube diameters from 1 mm. The SlimSens is available with accuracies of up to IEC 60751 F0.1 (IST AG reference class Y) and with long directly welded wires within various ohmic resistances. This Pt temperature sensor can be used in applications with an operation temperature range of up to +600 °C.

## Quality

Consistent with the well-known, high-quality standards in Switzerland, IST AG is certified according to ISO 9001:2015 (quality) and ISO 14001:2015 (environment).

Appropriate processes are part of our daily work. They are regularly audited and extended parallel to the growth of our company.

[> Read more](#)

## The online shop

| Quantity (pieces) | Price (per piece) |
|-------------------|-------------------|
|-------------------|-------------------|

|       |          |
|-------|----------|
| 25-49 | CHF 3.40 |
|-------|----------|

|       |          |
|-------|----------|
| 50-99 | CHF 2.16 |
|-------|----------|

|         |          |
|---------|----------|
| 100-100 | CHF 1.96 |
|---------|----------|

Stock: **0**