



MFM.EVAL.01.DI2C


MicroFlow Evaluation Module

Optimal for very low differential pressure applications

Benefits & Characteristics

- MFS05 micro flow sensor - MEMS component
- 5 Pa operating measuring range
- 2 million digital counts with 5 mPa noise free resolution
- Repeatability near zero less than 0.02 % full scale
- 24 bit resolution (flow / pressure)
- Patented flow measurement
- Integrated temperature measurement with 24 bit resolution
- Digital (I²C, SPI) or PWM signal output

Illustration¹⁾

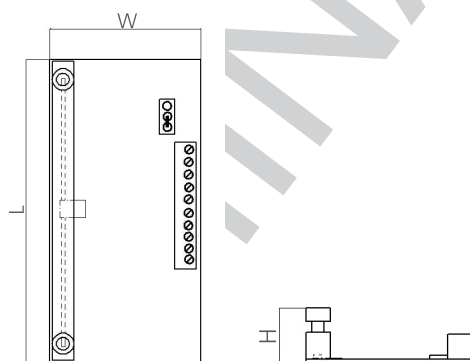

1) For actual size, see dimensions

Technical Data


Measuring principle:	Thermal
Operating measuring range:	0 ml/min to 10 ml/min (0 Pa to 5 Pa)
Response time:	Min. 100 ms
Resolution:	Approximately 5 µl/min
Operating temperature range:	+15 °C to +25 °C (calibrated at 23 °C)
Connection:	Screw terminal
Pneumatic connection:	Festo CK-M5-PK-4
Supply voltage (electronics):	3.3 V _{DC} ± 5 %
Supply voltage (heater):	5.0 V _{DC} ± 5 %
Current consumption:	3 mA at 3.3 V 5 mA at 5 V
Dimensions (L x W x H in mm)	70 x 35 x 14 (example)

Module available with I²C- or SPI-to-USB-adaptor and software for evaluation with PC
No reverse polarity or over voltage protection of supply voltage

* Customer-specific alternatives available




Pin Assignment

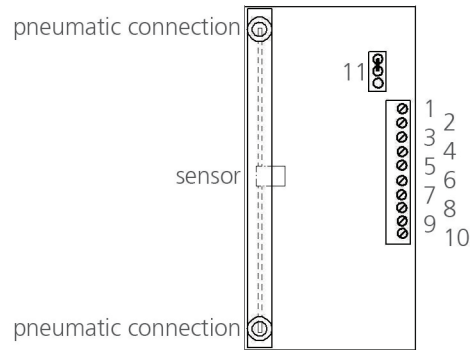

1	2	3	4	5	6
+3.3 V _{DC}		+5.5 V _{DC}	chip select	GND	SPI CKL / SCL
7	8	9	10	11	
SPI MOSI	SPI MISO / SDA			I ² C (default) or SPI	


Digital output signal of sensor frontend¹⁾

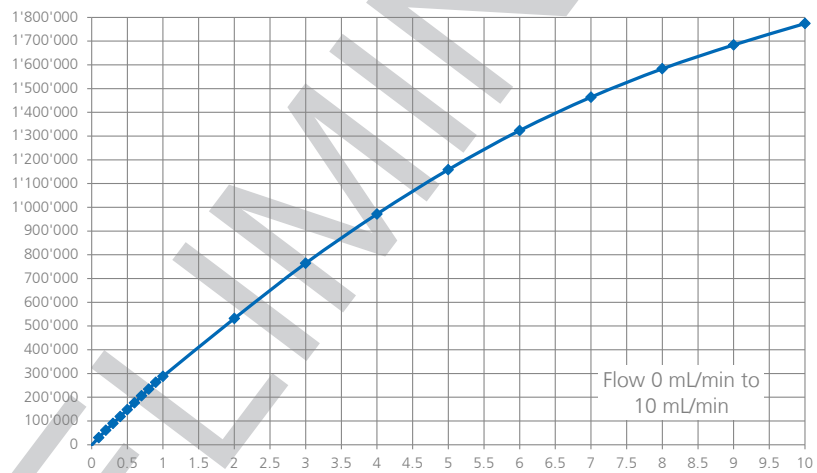

¹⁾ Depending on differential pressure



Digital output signal of sensor frontend¹⁾

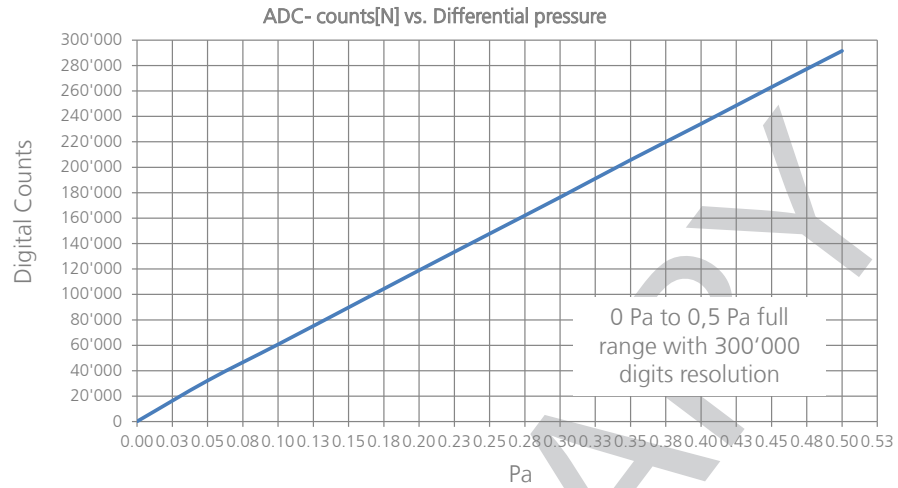

1) Depending on differential pressure

Order Information

Order code	MFM.EVAL.01.D12C upon request
------------	----------------------------------

PRELIMINARY



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved