



# HYT LCD Module


## LCD Module

Optimal for evaluation & demonstration of HYT modules

### Benefits & Characteristics

- Easy usage
- Automatic address determination of connected sensor
- I<sup>2</sup>C address change possible
- External or internal power supply
- Automatic switchover (internal / external)
- Correction of humidity and temperature measurement values
- Permanent storage of the correction values

### Illustration<sup>1)</sup>

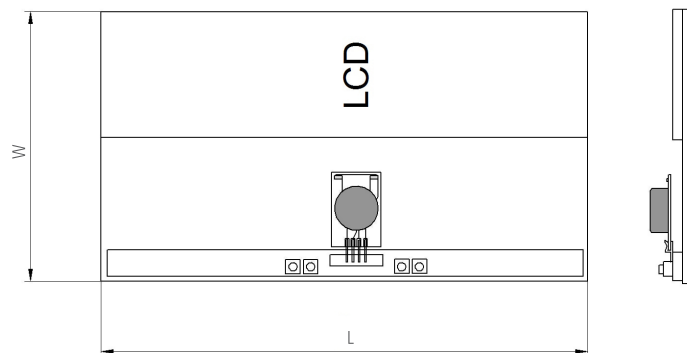

1) For actual size, see dimensions

### Technical Data

Dimensions (L x W x in mm):	70 x 40
Humidity output signal:	0 V to 10 V (0 % RH to 100 % RH)
Temperature output signal:	0 V to 10 V (-40 °C to +125 °C)
Sampling time:	1 s
Supply voltage:	3 V by internal CR2032 (battery not included) or 5 V by external supply, reverse polarity protected, automatic switchover
Current consumption:	< 4 mA
Supported sensor:	HYT 271 or HYT 221
Digital interface:	I <sup>2</sup> C
Display:	LC-display with 2x8 characters
Maximum output load:	10 mA



## Order Information<sup>1)</sup>

Order code	IST_HYT_LCDmodul 600.00054
------------	-------------------------------

1) The LCD-Module does not contain any sensors. The sensors must be ordered separately.

## Additional Documents

	Document name:
Data Sheet:	DHHYT271_E
Data Sheet:	DHHYT221_E
Data Sheet:	DHHYT939_E
Application Note:	AHHYTM_E



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland  
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: [info@ist-ag.com](mailto:info@ist-ag.com) | [www.ist-ag.com](http://www.ist-ag.com)

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved