



200 °C series

Platinum sensor with wires

For low temperatures




INNOVATIVE SENSOR TECHNOLOGY



Benefits & Characteristics

- Excellent long-term stability
- Low self-heating
- Long isolated wires
- Stranded wires available
- Fast response time
- Metalized backside available
- Customer specific sensor available upon request

Illustration¹⁾

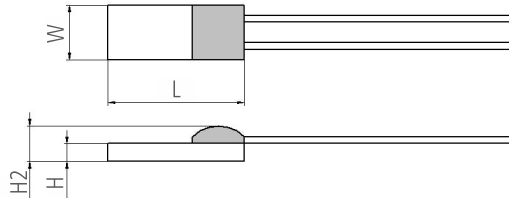

¹⁾ For actual size, see dimensions

Technical Data

Operating temperature range:	-50 °C to +200 °C	
Nominal resistance:*	100 Ω at 0 °C	
	500 Ω at 0 °C	
	1000 Ω at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (dependent on temperature range):*	IST AG reference	
	IEC 60751 F0.15	A
	IEC 60751 F0.3	B
	IEC 60751 F0.6	C
	IEC 60751 F0.1	Y
Connection:*	Cu/Ag single wire with PTFE (solderable, weldable, crimpable)	
	Cu/Ag stranded wire with PTFE (solderable, weldable, crimpable)	
	Ag-wire, Ø 0.25 mm, metalized backside	
Alternative wire construction:*	Inverted wires	
	Extended wires	
Recommended applied current: ¹⁾	1 mA at 100 Ω	
	0.5 mA at 500 Ω	
	0.3 mA at 1000 Ω	

¹⁾ Self-heating must be considered



200 °C series

Platinum sensor with wires

For low temperatures



INNOVATIVE SENSOR TECHNOLOGY



Other alternatives:*

Metalized backside
Housed in round ceramics (for dry environments only)
Grouped and paired
Substrate thickness

* Customer specific alternatives available

Order Information - 2I (Cu/Ag-wire, AWG30, PTFE insulated)

Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6	Upon request	Upon request	POK1.161.2I.B.050
Order code				010.02677
232	2.3 x 2 x 0.65 / 1.3	Upon request	POK1.232.2I.A.030	POK1.232.2I.B.030
Order code			010.02857	010.02071
232	2.3 x 2 x 0.65 / 1.3	Upon request	POK1.232.2I.A.050	POK1.232.2I.B.050
Order code			010.02487	010.00678
420	4 x 2 x 0.65 / 1.3	Upon request	Upon request	POK1.420.2I.B.015
Order code				010.03022
516	5 x 1.6 x 0.65 / 1.3	Upon request	Upon request	POK1.516.2I.B.030
Order code				010.00508
520	5 x 2 x 0.65 / 1.3	Upon request	Upon request	POK1.520.2I.B.100
Order code				010.00110
538	5 x 3.8 x 0.65 / 1.3	Upon request	Upon request	POK1.538.2I.B.060
Order code				010.00527
102	10 x 2 x 0.65 / 1.3	Upon request	Upon request	POK1.102.2I.B.050
Order code				010.01710
With substrate thickness 0.4 mm (D)				
516	5 x 1.6 x 0.4 / 1.05	Upon request	Upon request	POK1.516.2I.B.1000.D
Order code				010.00987
Nominal resistance: 500 Ω at 0 °C				
516	5 x 1.6 x 0.65 / 1.3	Upon request	Upon request	POK5.516.2I.B.080
Order code				010.02278
538	5 x 3.8 x 0.65 / 1.3	Upon request	Upon request	POK5.538.2I.B.035
Order code				010.00200
102	10 x 2 x 0.65 / 1.3	Upon request	Upon request	POK5.102.2I.B.070
Order code				010.00210



200 °C series

Platinum sensor with wires

For low temperatures



INNOVATIVE SENSOR TECHNOLOGY



Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 1000 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6	Upon request	Upon request	P1K0.161.2I.B.150
Order code				010.02674
161	1.6 x 1.2 x 0.25 / 0.6	Upon request	P1K0.161.2I.A.750	P1K0.161.2I.B.750
Order code			010.02833	010.02226
202	1.8 x 2.0 x 1	Upon request	Upon request	P1K0.202.2I.B.100
Order code				010.03229
202	1.8 x 2.0 x 1	Upon request	P0K1.202.2I.A.150	P1K0.202.2I.B.150
Order code			010.03162	010.06163
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.232.2I.B.015
Order code				010.01691
232	2.3 x 2 x 0.65 / 1.3	P1K0.232.2I.Y.150	P1K0.232.2I.A.050	P1K0.232.2I.B.050
Order code		010.02475	010.02712	010.02225
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.232.2I.B.080
Order code				010.02888
520	5 x 2 x 0.65 / 1.3	Upon request	P1K0.520.2I.A.050	P1K0.520.2I.B.050
Order code			010.00566	010.00565
102	10 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.102.2I.B.045
Order code				010.00699
102	10 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.102.2I.B.120
Order code				010.02810

Order Information - 2L (Cu/Ag-stranded wire, AWG28/7, PTFE insulated)

Size	Dimensions (L x W x H / H2 in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
202	2 x 2 x 0.65 / 1.3	Upon request	Upon request	P0K1.202.2L.B.010
Order code				010.02392
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P0K1.232.2L.B.050
Order code				010.00966
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P0K1.232.2L.B.100
Order code				010.00609
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P0K1.232.2L.B.150
Order code				010.00574
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P0K1.232.2L.B.1500
Order code				010.02115



200 °C series

Platinum sensor with wires

For low temperatures



INNOVATIVE SENSOR TECHNOLOGY



Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
520	5 x 2 x 0.65 / 1.3	Upon request	P0K1.520.2L.A.100	P0K1.520.2L.B.100
Order code			010.02802	010.02803
520	5 x 2 x 0.65 / 1.3	Upon request	Upon request	P0K1.520.2L.B.250
Order code				010.01116
Nominal resistance: 1000 Ω at 0 °C				
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.232.2L.B.150
Order code				010.00408
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.232.2L.B.200
Order code				010.01884
102	10 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.102.2L.B.270
Order code				010.00655

Order Information - 2W (Ag-wire, Ø 0.25 mm, metalized backside)

Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
232	2.3 x 2 x 0.65 / 1.3	Upon request	P0K1.232.2W.A.010.M	P0K1.232.2W.B.010.M
Order code			010.01684	010.00661
Nominal resistance: 1000 Ω at 0 °C				
232	2.3 x 2 x 0.65 / 1.3	Upon request	Upon request	P1K0.232.2W.B.010.M
Order code				010.02768

Additional Documents

Application Note:	Document name: ATP_E
-------------------	-------------------------



Order Information

Platinum sensor

Secondary reference



INNOVATIVE SENSOR TECHNOLOGY

Material

P = Platinum

TCR

= Pt 3850 ppm/K G = Pt 3911 ppm/K
 U = Pt 3750 ppm/K W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0 °C

Size in mm

Operating temperature range

1 = -50 °C to +150 °C 6 = -200 °C to +600 °C
 2 = -50 °C to +200 °C 7 = -200 °C to +750 °C
 3 = -200 °C to +300 °C 8 = -200 °C to +850 °C
 4 = -200 °C to +400 °C 10 = -70 °C to +1000 °C

Connections

S = SIL FK = flat wire customer specific
 I = insulated wire SW = perpendicular wire
 K = customer specific L = insulate stranded wire
 W = wire E = enameled Cu wire
 FW = flat wire

Tolerance class

A = IEC 60751 F0.15 K = customer specific
 B = IEC 60751 F0.3 P = pair
 C = IEC 60751 F0.6 G = group
 Y = IEC 60751 F0.1

Wire length in mm

Special

T = substrate thickness 0.25 mm M = metallized backside
 D = substrate thickness 0.38 mm U = inverted welding
 R = round housing S = special
 W = sintered powder

P OK1. 232. 2 W. A. 010. M



INNOVATIVE SENSOR TECHNOLOGY

Innovative Sensor Technology IST AG, Stegrütistrasse 14, CH-9642 Ebnat-Kappel, Switzerland
 Phone: +41 (0) 71 992 01 00 | Fax: +41 (0) 71 992 01 99 | E-mail: info@ist-ag.com | Web: www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved