



PG series

Platinum sensor with wires

For applications with GOST-coefficient 3911 ppm/K




INNOVATIVE SENSOR TECHNOLOGY

Benefits & Characteristics

- Capable of measuring in class A up to +600 °C
- Short-term applicable up to +750 °C
- Very low hysteresis
- Very stable characteristics curve
- GOST norm compatible (3911 ppm/K characteristics curve)
- Available with same Dimensions as a wire-wound sensor
- Customer specific sensor available upon request

Illustration¹⁾

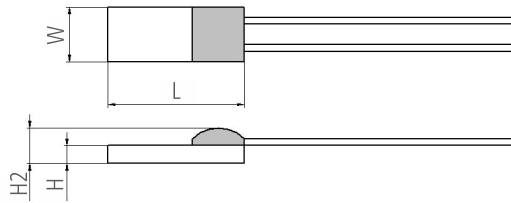

1) For actual size, see Dimensions

Technical Data

Operating temperature range:	-200 °C to +600 °C		
Nominal resistance:*	50 Ω at 0 °C 100 Ω at 0 °C 500 Ω at 0 °C 1000 Ω at 0 °C		
Characteristics curve:	3911 ppm/K		
Long-term stability:	< 0.04% at 1000 h at maximal operating temperature		
Tolerance class:*	IST AG reference		
	GOST 8.625-2006 F0.15	A	-200 °C to +600 °C
	GOST 8.625-2006 F0.3	B	-200 °C to +600 °C
	GOST 8.625-2006 F0.6	C	-200 °C to +600 °C
	GOST 8.625-2006 F0.1	Y	-200 °C to +500 °C
Connection:*	Pt wire, Ø 0.2 mm (solderable, weldable, crimpable) -200 °C to +600 °C Pt/Ni clad wire, Ø 0.2 mm (solderable, weldable, crimpable) -200 °C to +400 °C		
Alternative wire construction:*	Inverted wires		
Recommended applied current: ¹⁾	0.2 mA at 100 Ω 0.09 mA at 500 Ω 0.06 mA at 1000 Ω		
¹⁾ Self-heating must be considered			
Other alternatives:*	Housed in round ceramics (for dry environments only) Grouped and paired		



PG series

Platinum sensor with wires

For applications with GOST-coefficient 3911 ppm/K



INNOVATIVE SENSOR TECHNOLOGY

Order Information - 4K (Pt/Ni-wire, Ø 0.2 mm)

Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 50 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8	Upon request	PG050.216.4K.A.010	PG050.216.4K.B.010
Order code			010.02541	010.02542

Nominal resistance: 100 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8	PG0K1.216.4K.Y.010	PG0K1.216.4K.A.010	PG0K1.216.4K.B.010
Order code		010.02723	010.02544	010.02545

Nominal resistance: 500 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8	Upon request	Upon request	PG0K5.216.4K.B.010
Order code				010.02589

Order Information - 7W (Pt-wire, Ø 0.2 mm)

Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 50 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8	Upon request	Upon request	PG050.216.7W.B.007
Order code				010.02761

Nominal resistance: 100 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8	PG0K1.216.7W.Y.007	PG0K1.216.7W.A.007	PG0K1.216.7W.B.007
Order code		010.02762	010.02547	010.02548

Nominal resistance: 500 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8	PG0K5.216.7W.Y.007	PG0K5.216.7W.A.007	PG0K5.216.7W.B.007
Order code		010.02570	010.02572	010.02573



PG series

Platinum sensor with wires

For applications with GOST-coefficient 3911 ppm/K



INNOVATIVE SENSOR TECHNOLOGY



Order Information - R (in round ceramic housing, Pt/Ni-wire, Ø 0.2 mm)

Size	Dimensions (Ø x L in mm) Ø ±0.2 mm, L ±1 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
281	2.8 x 13	Upon request	PG0K1.281.4K.A.006.R	PG0K1.281.4K.B.006.R
Order code			310.00447	310.00264

Order Information - R (in round ceramic housing, Pt-wire, Ø 0.2 mm)

Size	Dimensions (Ø x L in mm) Ø ±0.2 mm, L ±1 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
281	2.8 x 13	PG0K1.281.7W.Y.004.R	PG0K1.281.7W.A.004.R	PG0K1.281.7W.B.004.R
Order code		310.00270	310.00269	310.00268

Additional Documents

	Document name:
Application Note:	ATP_E



Order Information

Platinum Sensor

Secondary reference



INNOVATIVE SENSOR TECHNOLOGY

Material

P = Platinum

TCR

= Pt 3850 ppm/K G = Pt 3911 ppm/K
 U = Pt 3750 ppm/K W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0 °C

Size in mm

Operating temperature range

1 = -50 °C to +150 °C 6 = -200 °C to +600 °C
 2 = -50 °C to +200 °C 7 = -200 °C to +750 °C
 3 = -200 °C to +300 °C 8 = -200 °C to +850 °C
 4 = -200 °C to +400 °C 10 = -70 °C to +1000 °C

Connection

S = SIL FK = flat wire customer specific
 I = insulated wire SW = perpendicular wire
 K = customer specific L = insulate stranded wire
 W = wire E = enameled Cu wire
 FW = flat wire

Tolerance class

A = IEC 60751 F0.15 K = customer specific
 B = IEC 60751 F0.3 P = pair
 C = IEC 60751 F0.6 G = group
 Y = IEC 60751 F0.1

Wire length in mm

Special

T = substrate thickness 0.25 mm M = metallized backside
 D = substrate thickness 0.38 mm U = inverted welding
 R = round housing S = special
 W = sintered powder

P G OK1. 281. 7 W. B. 004. R



INNOVATIVE SENSOR TECHNOLOGY

Innovative Sensor Technology IST AG, Stegrütistrasse 14, CH-9642 Ebnat-Kappel, Switzerland
 Phone: +41 (0) 71 992 01 00 | Fax: +41 (0) 71 992 01 99 | E-mail: info@ist-ag.com | Web: www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved