



# Heated HYT 223


## Digital Humidity and Temperature Module

### Optimal for critical application areas

#### Benefits & Characteristics

- Heatable digital humidity sensor
- With PTFE membrane filter for long term stability
- Calibrated and temperature compensated
- High chemical resistance
- Wide humidity and temperature range
- Excellent humidity/temperature accuracy and stability
- I<sup>2</sup>C protocol (address 0x28 or alternative address)
- Very low drift
- Interchangeable without adjustments
- Very stable at high humidity

#### Illustration<sup>1)</sup>

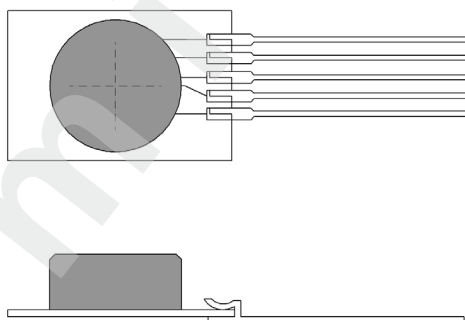

1) For actual size, see mechanical dimensions

#### Technical Data

Operating temperature range:	-20 °C to +120 °C
Operating humidity range:	0 % RH to 100 % RH
Hysteresis:	< ±1 % RH
Linearity error:	< ±1 % RH
Temperature error:	0.05 % RH/K (0 °C to +60 °C)
Operating voltage RH-component:	-0.3 V to 6 V
Current consumption RH-component:	< 22 µA at 1 Hz measuring rate
Current consumption (sleep):	< 1 µA
Digital interface:	I <sup>2</sup> C
Humidity output signal	% RH
Measuring principle	Capacitive polymer humidity sensor
Operating voltage heater:	7 V - 9 V
Power consumption heater	< 720 mW




	Humidity	Temperature	Heater
Accuracy:	0 °C to 50 °C: ± 1.8 % RH at 0 - 90 % RH ± 3.0 % RH at 90-100 % RH	0 to 60 °C: ± 0.2 °C	± -3 °C for T < 150 °C
Reproducibility:	±0.2 % RH	±0.1 K	
Resolution:	0.03 % RH	+0.015 °C	
Response time $t_{63}$ :	< 10 s	< 10 s	
Long-term drift:	< 0.5 % RH/a	< 0.05 K/a	

### Thermal reconditioning


HYT223 contains a microheating structure which allows for thermal reconditioning. A reconditioning cycle is recommended in challenging atmospheres and conditions. Length and interval required depend on the application environment. A possible reconditioning setting is heating the module with 7 to 9 V and 700mW power for 10 minutes every 24 hours.

During reconditioning, the read-out values are not calibrated measurement data.

### Mechanical Dimensions

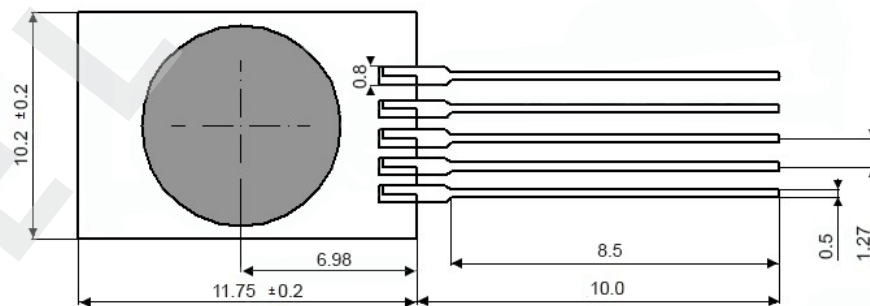

### Pin Assignment

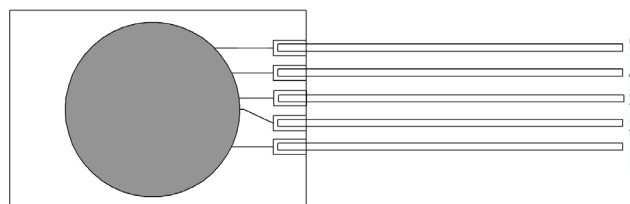

1	2	3	4	5
SDA	Ground	VDD	SCL	Heater



## Order Information

---

Order code	Heated HYT 223 151331
------------	--------------------------

## Additional Documents

---

Application Note:	Document name: AHHYTM_E
-------------------	----------------------------



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland  
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: [info@ist-ag.com](mailto:info@ist-ag.com) | [www.ist-ag.com](http://www.ist-ag.com)

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Product specifications are subject to change without notice • All rights reserved