



HPM.HYT 939P.K.0.KK.SA.S

Low Humidity Digital RH/T Transducer

HYT939 assembly for low humidity monitoring



A compact and ready-to-use sensor for process control of industrial processes sensitive to condensation. Continuous and highly accurate measurement of relative humidity and temperature, to ensure compliance with dew point setpoints. System integration is made easy by a digital interface and small screw-in housing. Custom calibration and assembly options upon request.

Benefits & Characteristics

- Best suitable for process control based on dew point monitoring down to $-40\text{ }^{\circ}\text{C Tdp}$
- Easy to integrate into compressed air systems with a screw-in housing
- Ready-to-use, factory calibrated humidity sensor with digital I²C outputs

Applications

- Ultra-pure air production, distribution and supply systems (e.g., compressors)
- Compressed air operated systems (e.g., pneumatic brakes, medical tools)
- Industrial systems sensitive to humidity (e.g. lasers)
- Air barrier and sensitive drying process (e.g., laminar flow packaging)
- Component testing (e.g., semiconductor manufacturing)

Technical Data



	Humidity	Temperature
Accuracy	±0.5 %RH at 23 °C (0 to 5 %RH) ±1.0 %RH at 23 °C (5 to 10 %RH) See figure 1 for typical accuracies in the measuring temperature range. Custom specific alternatives available.	±0.2 °C (0 to 60 °C)
Reproducibility	±0.2 %RH	±0.1 °C
Resolution	0.03 %RH	0.015 °C
Response time T_{63}^1	< 10 s	< 10 s
Long-term drift	< 0.5 %RH/a (at 23 °C 0 %RH to 10 %RH in synthetic air). Exposure to VOCs can lead to higher values. Please find more details in HYT application note.	< 0.05 °C /a
Measurement principle	Capacitive polymer humidity sensor	PTAT (integrated)
Measuring temperature range ²	0 °C to +60 °C	
Measuring humidity range ²	0 %RH to 10 %RH For usage in condensing environment please refer to HYT application note	
Hysteresis	< ±1 %RH at 25 °C	
Operating voltage	2.7 V to 5.5 V	
Current consumption (nominal)	< 22 µA at 1Hz measuring rate; 850 µA max.	
Current consumption (sleep)	< 1 µA	
Digital interface	I ² C, address 0x28 or alternative address	
Operating voltage (limits)	-0.3 V to 6 V	
Storage conditions	+5 to +30 °C, < 30 %RH	
Operating range ³	-40 to +80 °C, 0-100 %RH	
Housing material	Stainless steel	
Process connector	M14 x 1.5	
Cable	4x AWG 26, 500 mm	

1) The response time is often measured for increasing humidity steps, whereas physics predicts that decreasing humidity leads to generally far longer response times for capacitive humidity sensors. IST thus measures response times always for decreasing humidity values, since this is the worst case.

2) In the specified range the modules measure according to typical accuracies demonstrated in figure 1. At T > 60 °C and/or high humidity over a long period of time, an offset in the %RH signal can occur.

3) Specifies the temperature range the modules work without permanent damage. Operation/storage above +60 °C can lead to an offset of the %RH signal.

4) The maximum bending radius of the cable is for single bending 5x outer diameter (4.1 mm) and for repeated bending 20x outer diameter (4.1 mm). Bending closer than 50 mm to the housing is discouraged and might harm the cable or potting material. The cable must not be stretched or pulled.


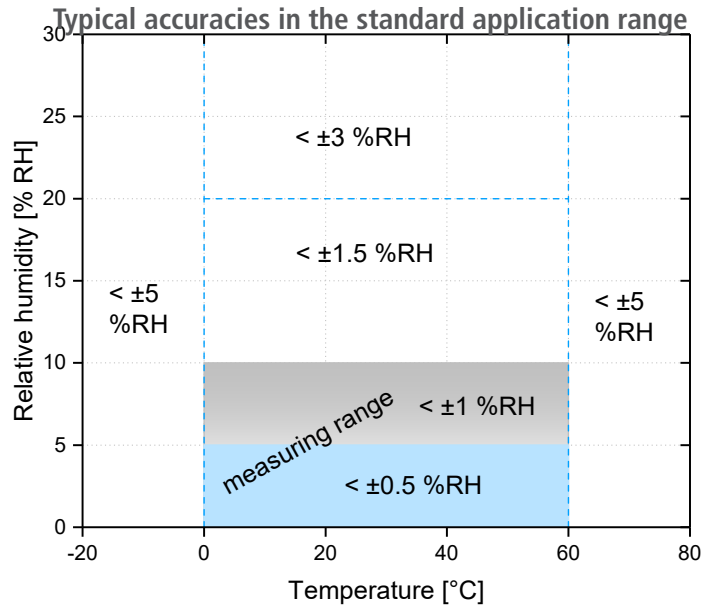


Figure 1: Typical accuracies of the % RH measurement

Mechanical Dimensions

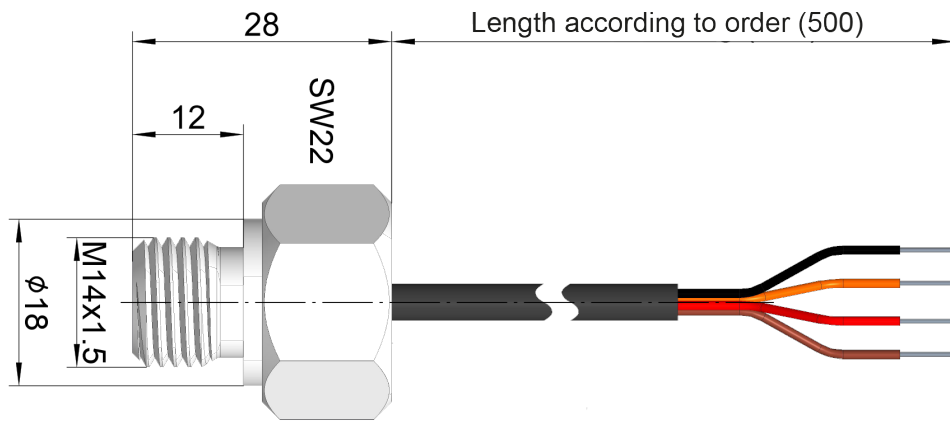

Pin Assignment

Insulation Color	Assignment
Black (SW)	SDA
Orange	SCL
Brown	GND
Red	VCC / 3V3



Additional Documents



Order Information



Document name

Application Note

ANH_001

RH/T module

RH/T module with PTFE filter

Product name

HPM.HYT.939p.K.0.KK.SA.S

HPM.HYT.939p.K.0.KK.SA.S

Order code

153326

157097



Innovative Sensor Technology IST AG · Stegrütistrasse 14 · 9642 Ebnat-Kappel · Switzerland
+41 71 992 01 00 · info@ist-ag.com · www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of errors or or typing mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Product specifications are subject to change without notice • All rights reserved