



HPM.HYT.272.M.0.SK.SA.S

Moisture in Oil

Digital Humidity and Temperature Module

Ideal for monitoring water content in oils


Benefits & Characteristics

- Sensitive moisture analysis in different mineral and synthetic oils incl. gear, transformer, hydraulics and lubricant applications
- Fully calibrated and temperature compensated
- Thermal and chemical robustness with a MK33 capacitive humidity sensors
- Interchangeable without adjustments
- Digital signal output: I²C protocol
- Screw-in stainless steel housing (M14)

Illustration

A compact and ready-to-use sensor for monitoring the water content of many different oils and fuels based on capacitive humidity measurement. The relative humidity output can give detailed information on condition and lifetime of different oils.

Continuous and highly accurate measurement of relative humidity and temperature. System integration is made easy by a digital interface and screw-in housing. Stainless steel housing for robust integration in harsh environments.

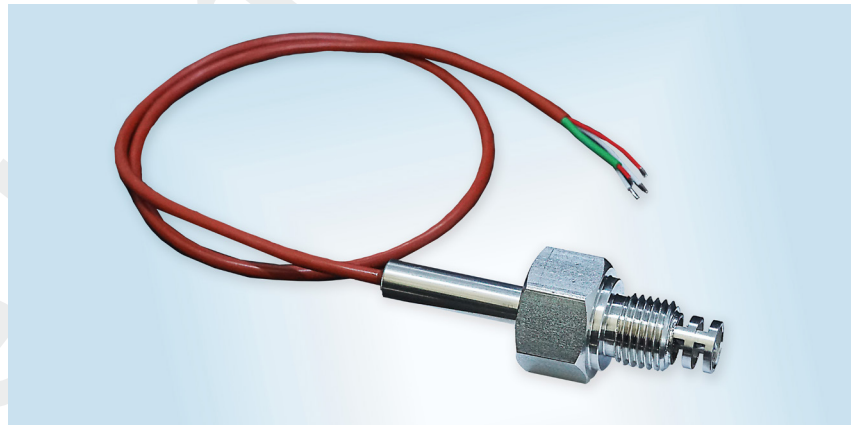


Technical Data

Operating temperature range:	-40 °C to +120 °C	
Operating humidity range:	0 %RH to 100 %RH	
Accuracy:	Humidity	±3 %RH at 23°C (0 to 90 %RH)
	Temperature	±0.2 °C (0 to 60 °C)
Reproducibility:	Humidity	±0.2 %RH
	Temperature	±0.1 °C
Resolution:	Humidity	0.03 %RH
	Temperature	0.015 °C
Response time t_{63} in air:	Humidity	< 4 s
	Temperature	< 5 s
Hysteresis:	< ±1 % RH at 23 °C	



Operating voltage:	2.7 V to 5.5 V
Current consumption (nominal):	< 22 μ A at 1 Hz measuring rate; 85 μ A max.
Current consumption (sleep):	< 1 μ A
Digital interface:	I ² C, default address 0x28
Operating voltage (limits):	-0.3 V to 6 V
Storage conditions:	-10 to +50 °C Please refer to HYT application note for packaging recommendations
Housing material:	Stainless steel 1.4571
Process connector:	M14x1.5 mm
Cable:	4x AWG 26, 500mm, open ends

Mechanical Dimensions

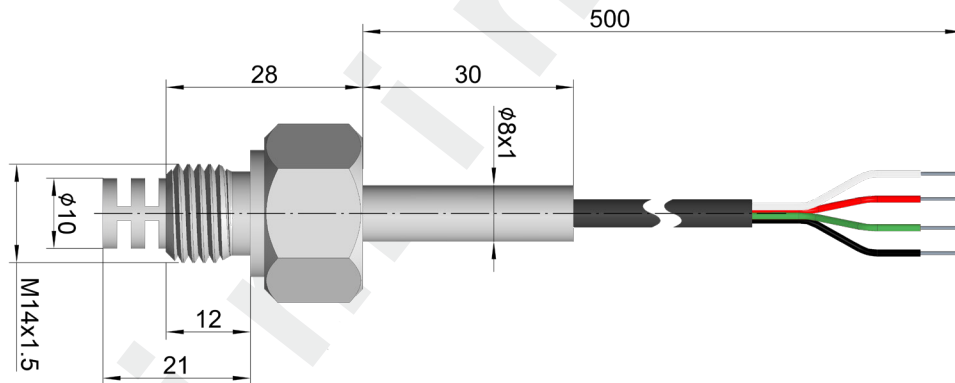

Pin Assignment

Insulation Color	White	Green	Black	Red
Assignment	SCL	SDA	GND	VDD

Information on signal transmission via I²C and on the pull-up resistors can be found in the Application Note.

Order Information

Product name	HPM.HYT.271.M.0.SK.SA.S
Order code	155958

Additional Documents

Application Note:	Document name: ANH_001
-------------------	---------------------------

Disclaimer

As additives may affect the long-term stability of the humidity measuring device, an evaluation of compatibility and measurement performance of the module in a particular oil under application relevant conditions is recommended.

Innovative Sensor Technology IST AG, Stegrütstrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Product specifications are subject to change without notice • All rights reserved