





The calibration of the sensor must be done 5 days after soldering at the earliest.

Characteristic Curve

Wired

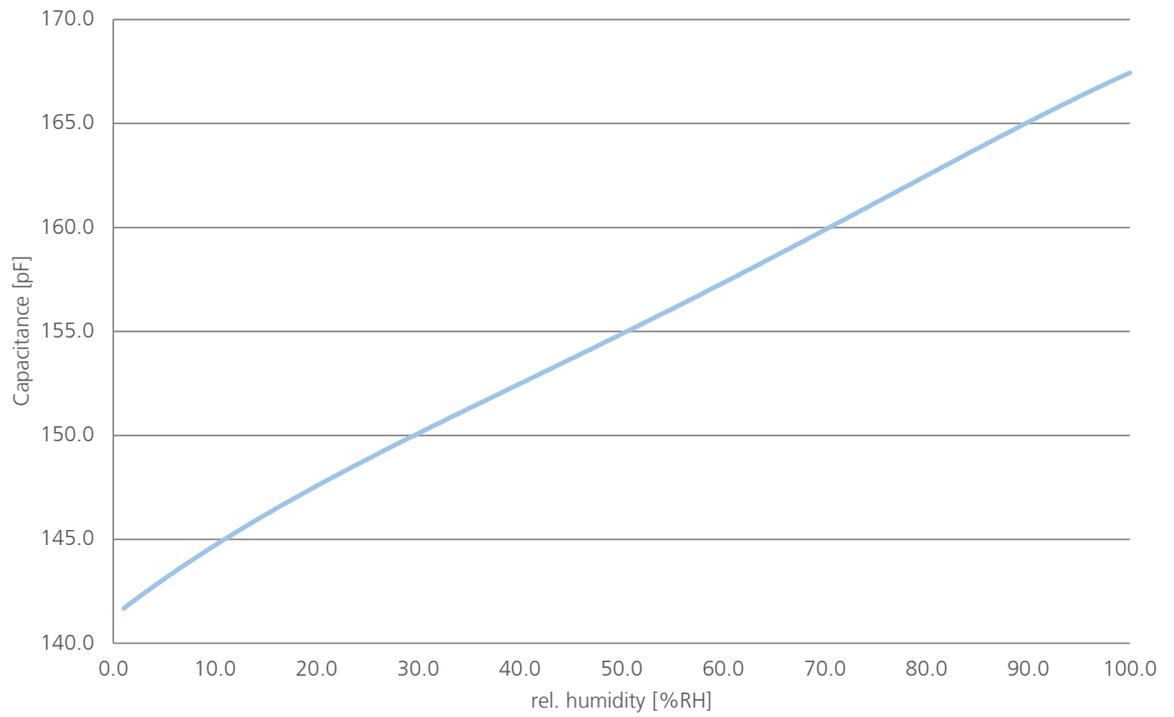


SMD

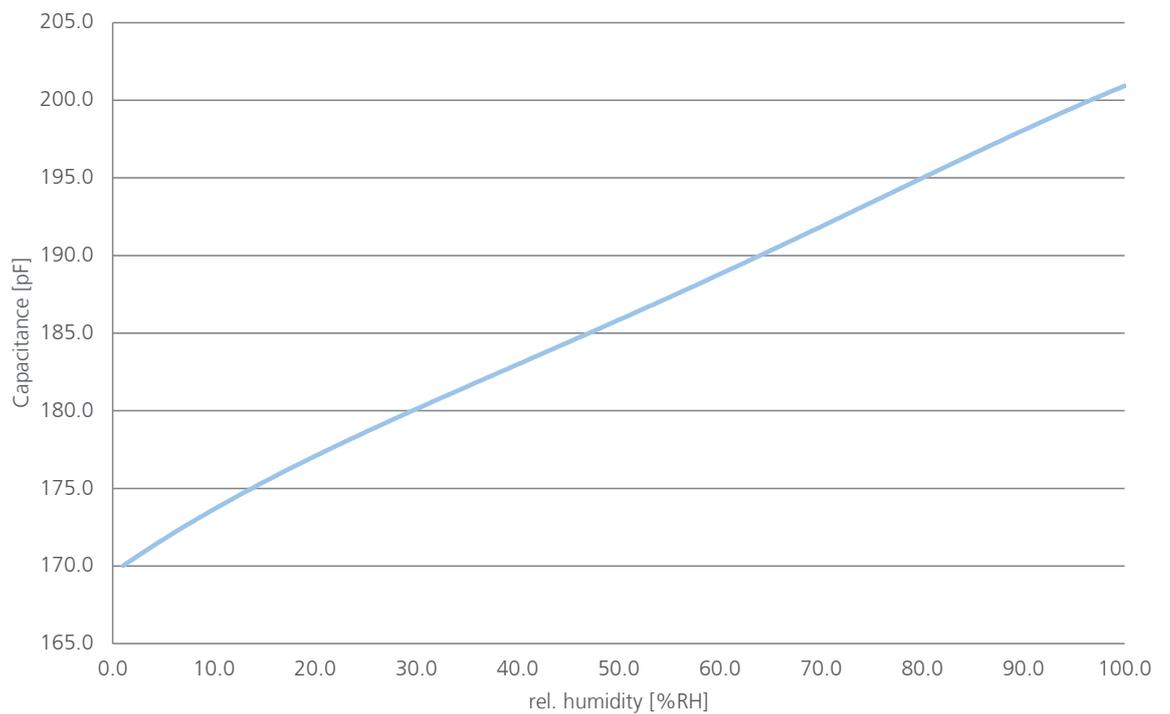



Product Photos

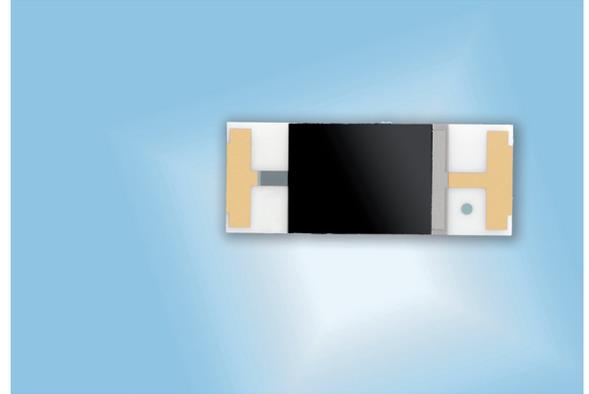

Order Information - SIL (CuP-SIL-wire post-plated with Sn, 10 mm)

	P14 (150pF ±50pF)	
Order code	103580	replaced by 150473
Former order code	040.00191	

Order Information - SMD

	P14 SMD-G (180pF ±50pF)	
Order code	103562	
Former order code	040.00109	

Order Information - Au/Cu-wire, Ø 0.4 mm, 10 mm

	P14-W (150pF ±50pF)	
Order code	103572	replaced by 150466
Former order code	040.00174	

Order Information - Cu/Ag-wire, 18 mm, AWG26, PTFE, insulated 8 mm

	P14.S-W (150pF ±50pF)	
Order code	103577	replaced by 150470
Former order code	040.00184	



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved