
P14 4051 FW Thermo Rapid 2

Capacitive Humidity Sensor with on-chip heater & temperature sensor

Optimal for weather balloons /radio sondes

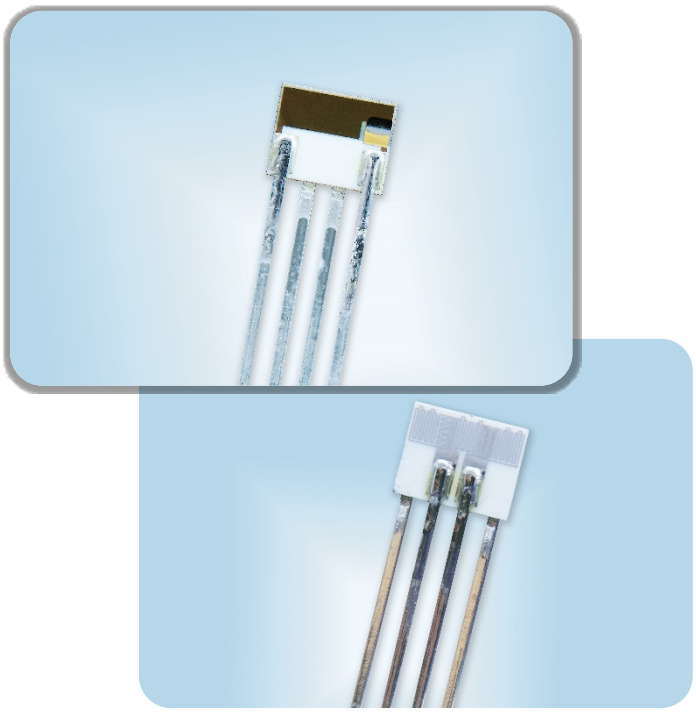

Benefits & characteristics

- Extraordinary fast response time: 3x faster than P14 Rapid
- Temperature shock resistant
- Robust against icing
- Humidity sensor with on-chip heater and temperature sensor
- Outstanding sensitivity
- Customer-specific sensor available on request

Illustration [1)]



Front side: humidity sensor



Back side: heater/temperature sensor



Side view

1) for actual size see dimensions in order information

Technical data

Dimensions (L x W x H/H2 in mm):	40 x 5.1 x 0.4 /1.5
Operating humidity range:	0 % RH to 100 % RH (maximal dew point +85 °C)
Operating temperature range:	-80 °C to +150 °C
Heater / temperature sensor:*	Pt100 (100 Ω at 0 °C)
Heater/temperature sensor accuracy:	IEC60751 ±1%: ±(2.59 + 0.05 x |T|) °C |T| = absolute value of temperature in °C
Capacitance (C_{30}):*	650 pF ±150 pF (at 30 % RH and +23 °C)
Typical sensitivity (at C_{30} = 650 pF):	1 pF/% RH (15 % RH to 90 % RH)
Loss factor:	< 0.05 (at 23 °C, at 10 kHz, at 15 % RH to 90 % RH
Linearity error:	< 1.5 % RH (15 % RH to 90 % RH at +23 °C) after one-point calibration
Response time t_{63}: [2)]	0.3 s ± 0.2s (50 % RH to 0 % RH at +23 °C)


2) The response time is often measured for increasing humidity steps,whereas physics predicts that decreasing humidity leads to generally far longer response times for capacitive humidity sensors. iST thus measures response times always for decreasing humidity values, since this is the worst case

Temperature dependence (nominal):	Δ % RH = (B1 x % RH + B2) x T [°C] + (B3 x % RH + B4)	
	B1 = 0.0014 [1/ °C]	B2 = 0.1325 [% RH/ °C]
	B3 = -0.0317	B4 = -3.0876 [% RH]
Measurement frequency range:	1 kHz to 100 kHz (recommended 10 kHz)	
Maximal supply voltage:	< 12 V_{pp} AC	
Signal form:	alternating signal without DC bias	
Connection: *	CuSn flat wire, 10 mm W x H: 0.5 x 0.25 mm with 1.27 mm pitch	

*Customer-specific alternatives available

The calibration of the sensor must be done 5 days after soldering at the earliest

Mechanical Dimensions

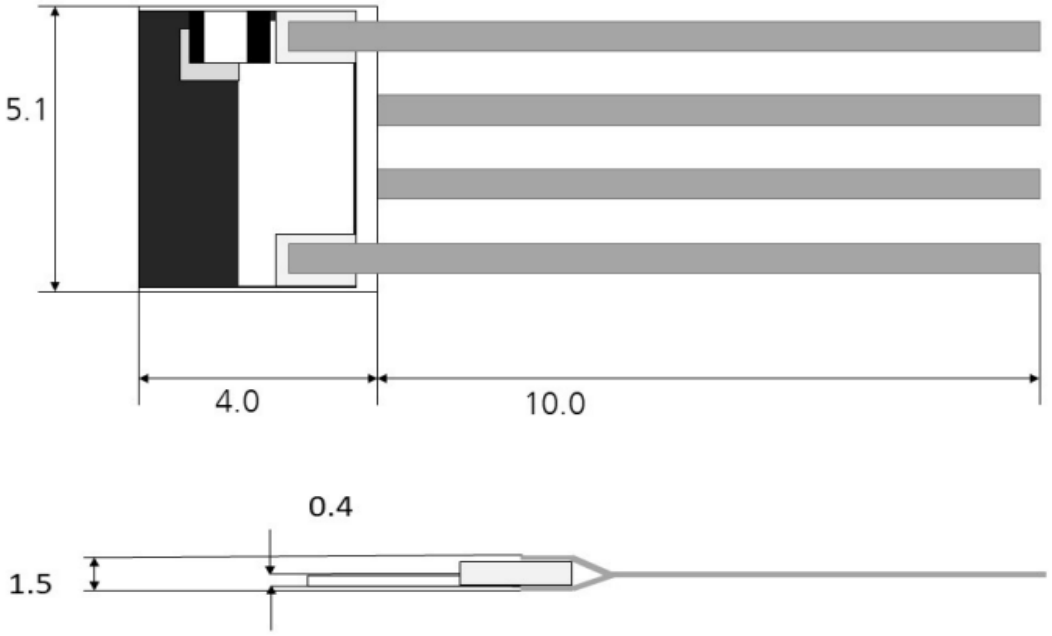


Pin Assignment




1	2	3	4
Humidity Sensor	Heater/Temperature Sensor	Heater/Temperature Sensor	Humidity Sensor

Response Time

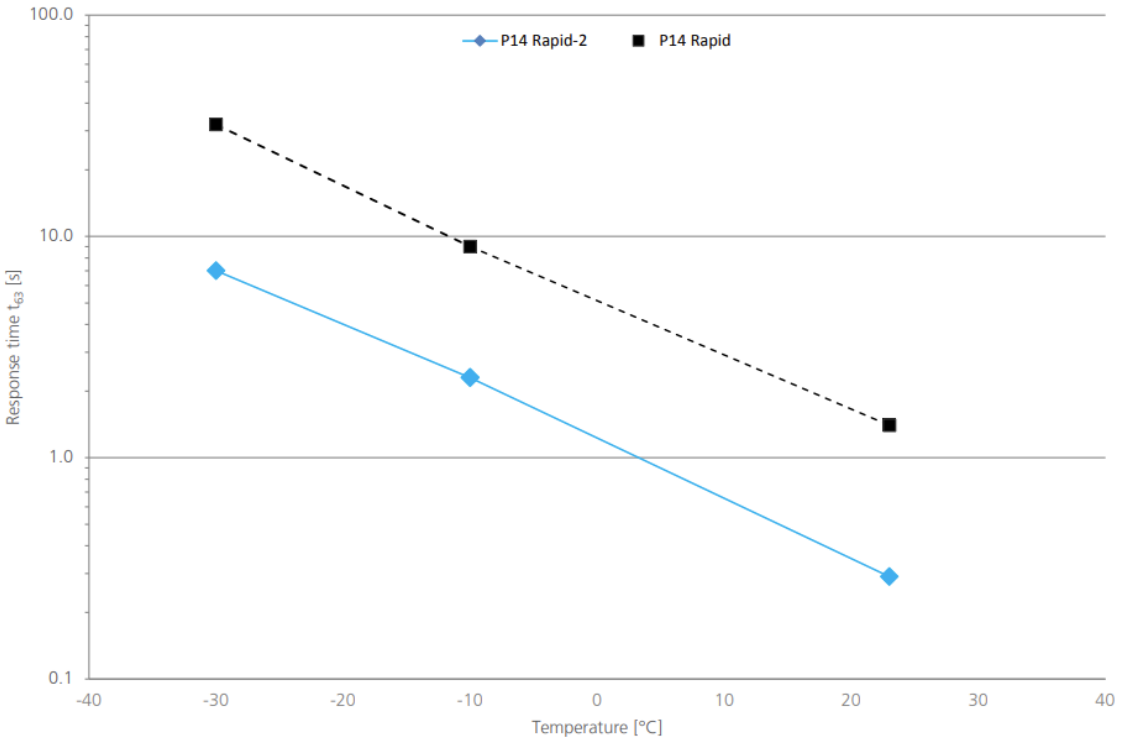

Characteristic Curve (typical)

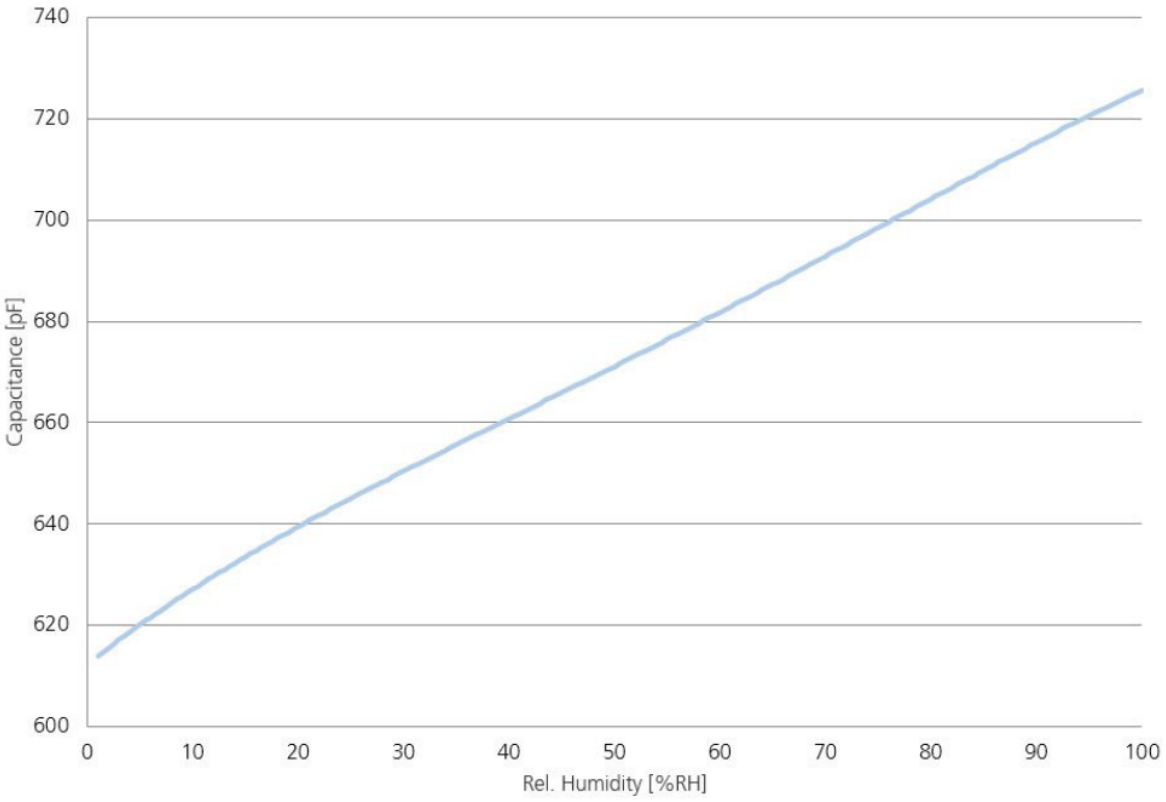

Order Information

Product Title	P14 4051 FW Thermo Rapid 2
Order code	159869
Former order code	*154150*

Additional Documents

	Document name:
Application Note:	AH_E

Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com •www.ist-ag.com

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.