




# Out of Liquid Thermal Mass Flow Sensor

## Optimal for flow applications in aggressive liquids

### Benefits & Characteristics

- Suitable for aggressive liquids
- No contact between sensor and liquid
- High chemical resistance
- Simple flow switches possible

### Illustration<sup>1)</sup>

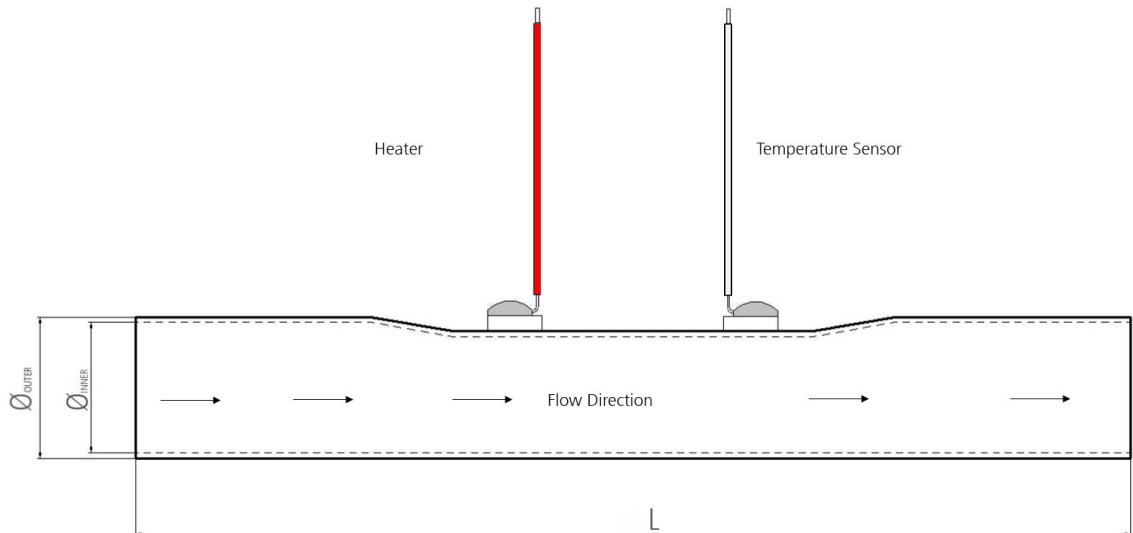

1) For actual size, see dimensions

### Technical Sensor Data

Tube dimensions (L x Ø <sub>OUTER</sub> (x Ø <sub>INNER</sub> ) in mm):*	40.0 x 4.0 (x 3.8)
Operating temperature range:	-50 °C to +150 °C The temperature range has an impact on the accuracy, depending on variations in the thermal properties of flowing media
Heater resistance:*	R <sub>H</sub> (0 °C) = 50 Ω (red wires)
Temperature sensor resistance:*	R <sub>S</sub> (0 °C) = 1000 Ω (white wires)
Operating measuring range:	0 ml/min to 3000 ml/min (4 m/s)
Characteristics curve (TCR):	3850 ppm/K
Accuracy:	IEC 60751 F0.6 (class C)
Sensor wire:*	Cu/Ag, stranded wires PTFE isolated, AWG 30/19, 50 mm
Sensor dimensions (L x W x H x LW in mm)	2.3. x 2.0 x 1.3
Tube Material:*	Stainless steel 1.4301/304

[\\*customer specific versions on request](#)




## Flow Performance

The following values are viewed as typical and achieved in laboratory conditions. The medium was deionized water.

Measurement range:	0 - 20 kg/h (laminar flow profile) 20 - 200 kg/h (turbulent flow profile)
Sensitivity:	< 0.1 m/s
Response time $t_{63}$ :	< 500 ms, dependent on electronics (used average determination)
Accuracy:	Typically 3% of measured value (depending on electronics and calibration)
Temperature sensitivity (uncomp.):	< 0.3% /K (depending on electronics and calibration)
Maximum Heating range:	0.75 W
Overtemperature (CTA-mode):	10 - 15 K (recommended) max. 30 K

## Product Photo

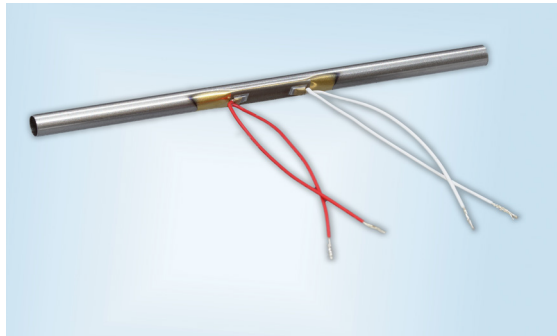

## Order Information

Order code	P1K0/050.232.2K.C.050.M.U.S 104171
------------	---------------------------------------

## Additional Electronics

Module:	DFOOL_Demo_Module_E	Document name:
Order code	104021	
Former order code	160.00026	

