


Conductivity sensor for low conductivity

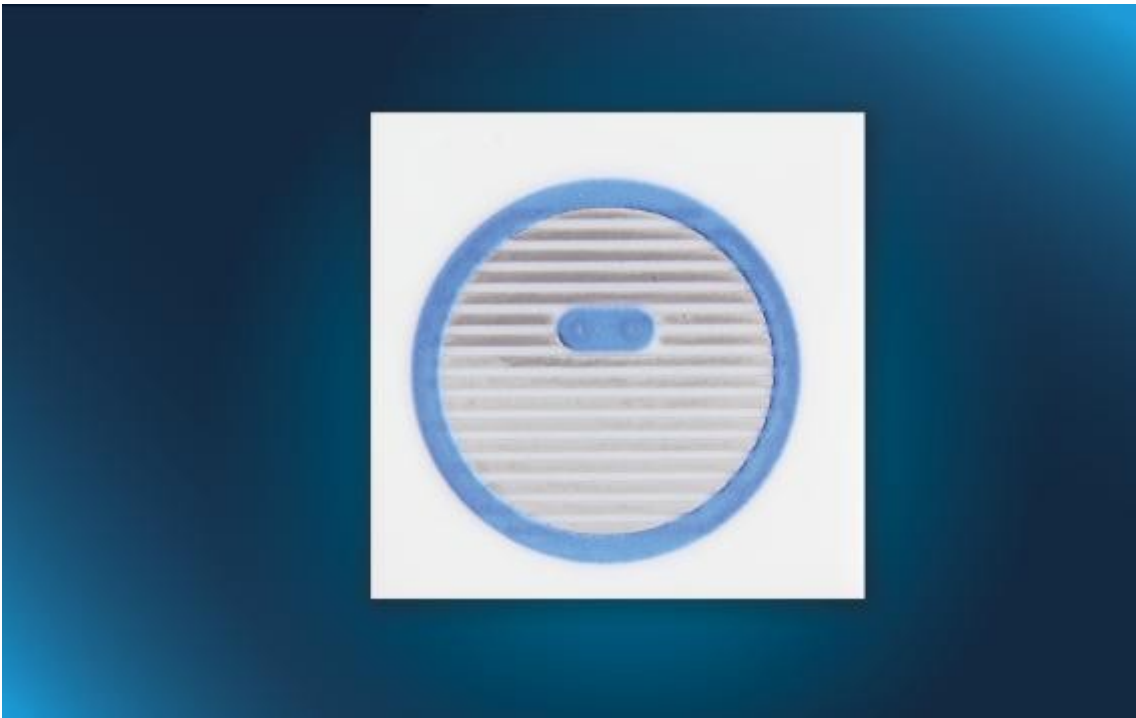

Optimal for applications with a conductivity measuring range from 1 $\mu\text{S}/\text{cm}$ to 15 $\mu\text{S}/\text{cm}$ (typical cell constant of 0.2 cm^{-1})

Ideal for lower conductivity measurement applications, e.g. coolant or pure water monitoring

Product Name: LFS.2ID.1212.63A2.4FC.P1K0.B

□□□□ : 1 $\mu\text{S}/\text{cm}$ to 15 $\mu\text{S}/\text{cm}$

□□□□ : typical 0.2 cm^{-1}

Layout: 2 Interdigitated electrodes and soldered temperatures sensor (Pt1000, class F0.3) on backside

□□□□□ : -30 $^{\circ}\text{C}$ to + 100 $^{\circ}\text{C}$

TCR□□□□ : Platinum 3850 ppm/K

□□□□ : 1000 Ω at 0 $^{\circ}\text{C}$

□□ /□□ : IEC 60751 F0.3 (Class B)

□□□□ /□□ :

11.85 mm x 11.85 mm x 0.63 mm (without temperature sensor soldered on backside)

 : Solderable pads

Product code: 158919

Product details

Conductivity sensor for middle conductivity range > Details

Benefits & Characteristics of the conductivity sensor

- Wide conductivity and temperature range
- Fast response time
- Optimal accuracy
- Resistance to various chemicals
- Excellent long-term stability
- Four-electrode measurement
- Customer-specific sensor available upon request

Quality

Consistent with the well-known, high-quality standards in Switzerland, IST AG is certified according to ISO 9001:2015 (quality) and ISO 14001:2015 (environment).

Appropriate processes are part of our daily work. They are regularly audited and extended parallel to the growth of our company.

[> Read more](#)

The online shop

Quantity (pieces)	Price (per piece)
5-49	CHF 25.00
50-95	CHF 23.00
100-150	CHF 22.00

 : 50